SEG SOLAR

www.segsolar.com



YUKON N Series

Half-Cell N-Type Bifacial Module

430-445Wp Module Power Output

22.79% Max Efficiency

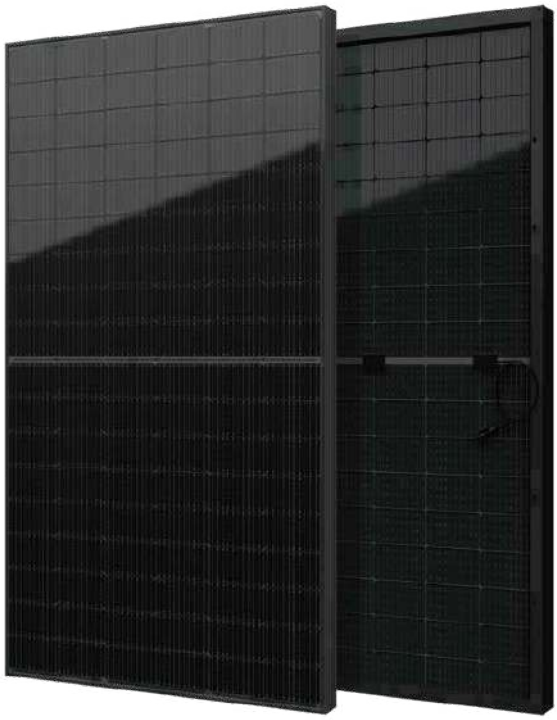

Key Features

- High module conversion efficiency
- Better temperature coefficient
- Super multi busbar technology
- Low attenuation long warranty
- Superior load capacity
- Higher bifaciality
- USA based liability insurance
- Houston, Texas based company

Warranty

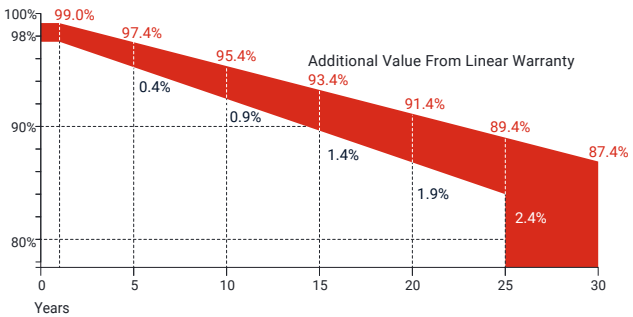

30 Years Guarantee on product material and workmanship

30 Years Linear power output warranty

Product Certification

IEC61215; IEC61730; UL61215; UL61730	
IEC62804	PID
IEC61701	Salt Mist
IEC62716	Ammonia Resistance
IEC60068	Dust and Sand
IEC61215	Hailstone
Fire Type (UL61730): Type 29	
ISO14001:2015; ISO9001:2015; ISO45001:2018	

Intertek · PV CYCLE · CE · TÜV SÜD · DEKRA · CALIFORNIA ENERGY COMMISSION · FSEC

About SEG Solar

Founded in 2016, SEG is a leading vertically integrated PV manufacturer headquartered in Houston, Texas, U.S., and is dedicated to delivering reliable and cost-effective solar modules to the utility, commercial, and residential markets. By the end of 2024, SEG had shipped over 6 GW of solar modules worldwide and have achieved a module production capacity of 6 GW.

Download Datasheet

YUKON N Series SEG-XXX-BTD-BG-108Cells

Electrical Characteristics

Module Type	SEG-430-BTD-BG			SEG-435-BTD-BG			SEG-440-BTD-BG			SEG-445-BTD-BG		
	Front STC	Front NOCT	Back STC	Front STC	Front NOCT	Back STC	Front STC	Front NOCT	Back STC	Front STC	Front NOCT	Back STC
Maximum Power -Pmp(Wp)*	430	324	344	435	328	348	440	332	352	445	336	356
Open Circuit Voltage -Voc(V)	38.90	36.96	38.88	39.10	37.19	39.08	39.30	37.41	39.28	39.50	37.63	39.48
Short Circuit Current -Isc(A)	13.99	11.19	11.19	14.07	11.26	11.26	14.15	11.33	11.33	14.24	11.40	11.40
Maximum Power Voltage -Vmp(V)	32.30	30.41	32.28	32.50	30.63	32.48	32.70	30.83	32.68	32.90	31.02	32.88
Maximum Power Current -Imp(A)	13.32	10.66	10.66	13.39	10.71	10.71	13.46	10.77	10.77	13.53	10.83	10.83
Module Efficiency(%)		22.02			22.28			22.53			22.79	
Power Tolerance(W)	(0, +4.99)											
Maximum System Voltage	1500V DC											
Maximum Series Fuse Rating	30 A											
Bifaciality	80±10%											

STC: Irradiance 1000 W/m² module temperature 25°C AM=1.5 NOCT: Irradiance 800W/m² ambient temperature 20°C module temperature 45°C wind speed: 1m/s

*Measuring tolerance: ±3%

Mechanical Specifications

External Dimension	1722 x 1134 x 30 mm
Weight	24.0 kg
Solar Cells	N-Type Mono 108 pcs(54 x 2)
Front Glass	2.0 mm AR coating semi-tempered glass
Back Glass	2.0 mm Semi-tempered glass
Frame	Black anodized aluminium alloy
Junction Box	IP68 / 3 diodes
Connector Type	MC4
Cable Type Cable Length	12 AWG PV Wire(UL) Portrait: 400 mm(+) / 200 mm(-) Landscape: 1200 mm(+) / 1200 mm(-) or customized length
Mechanical Load(Front)	5400 Pa / 113 psf*
Mechanical Load(Rear)	2400 Pa / 50 psf*

*Refer to SEG installation manual for details

Technical Drawing

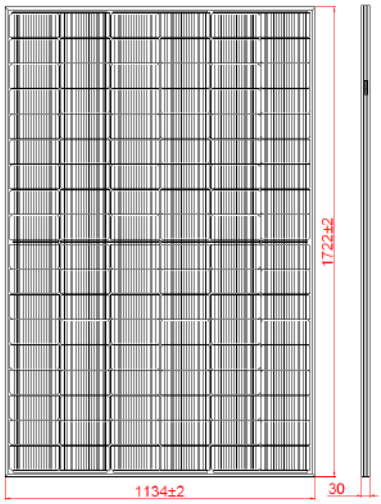

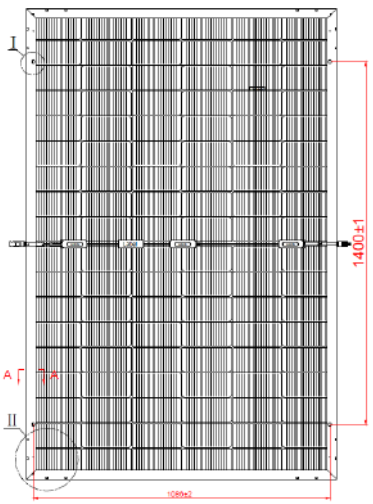

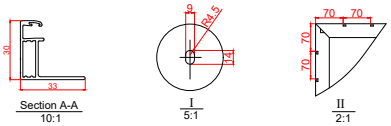

*Refer to SEG installation manual for details

Temperature Characteristics

Pmax Temperature Coefficient	-0.30 %/°C
Voc Temperature Coefficient	-0.25 %/°C
Isc Temperature Coefficient	+0.046 %/°C
Operating Temperature	-40~+85 °C
Nominal Operating Cell Temperature (NOCT)	45±2 °C

Packing Configuration

Container*	20'GP	40'HQ	40'HQ (For USA)
Pieces per Pallet	36	36	36
Pallets per Container	6	24	22
Pieces per Container	216	864	792

*Refer to the SEG container technical documentation for 53' box trailer or other trucks loading quantity

Curves of PV Module

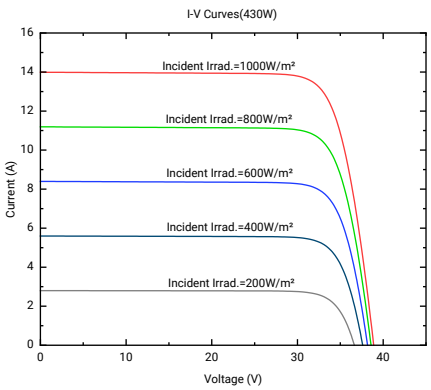

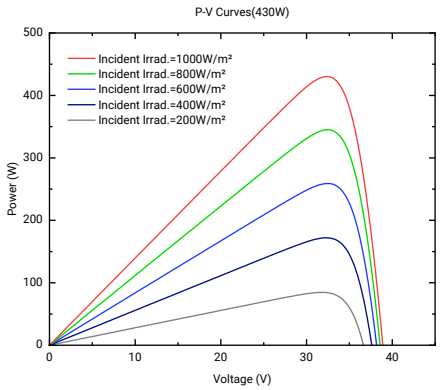

Specifications subject to technical changes SEG_DS_EN_2025V2.0 © Copyright 2025 SEG Solar